




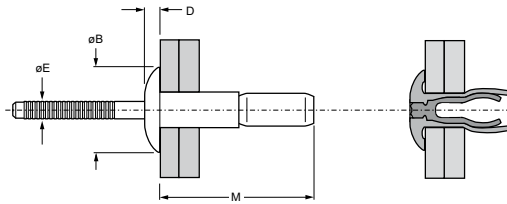



For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* (5 % Mg) Natural	Corps: Alliage d'aluminium* (5% Mg) Brut	Hülse: Aluminium* (5 % Mg) Blank	Corpo: Lega di alluminio* (5 % Mg) Nessuna finitura	Cuerpo: Aluminio* (5% Mg) Natural
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

*: BS 1473 5056 DIN 1725 AlMg5 Werkstoff 3.3555
 **: 7178



Ø					M	ØB	D	ØE					Part No/ref
	min.	max.	min.	max.					min.	typ. ¹⁾	min.	typ. ¹⁾	
4.8 (3/16")	1.57	6.86	4.93	5.18	21.39	10.16	2.29	3.10	2.66	3.34	2.00	2.22	BAPI-06-04
	5.44	11.10			22.23								BAPI-06-07
	1.57	11.10			24.77								BAPI-E06-07
	9.53	15.88			27.69								BAPI-06-10
6.4 (1/4")	2.03	9.53	6.63	7.01	30.00	13.46	2.97	4.11	5.78	6.23	3.69	4.00	BAPI-08-06
	8.89	15.88			33.02								BAPI-08-10
	2.03	15.88			35.56								BAPI-E08-10

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / valores típicos