




For installation information please refer to the tooling overview and manuals on our website.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Low profile	Auto-affleurante	Extra kleiner Kopf	Testa a fila	Sin ala
Closed end	Borgne	Geschlossen	Fondo cieco	Fondo cerrado
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

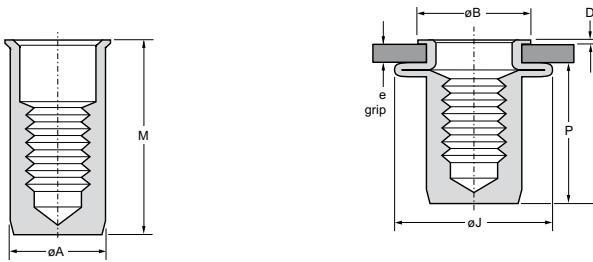

Thread filetage / Gewinde / filetto / rosca	e (grip)		+0.1/-0	øA max.	øB max.	D max.	øJ max.	M max.	P max.	Part No/ref
	min.	max.								
M4 x 0.7	0.51	2.00	6.35	6.34	7.50	0.64	10.00	14.91	11.70	0FS38-70418
M5 x 0.8	0.51	3.00	7.15	7.13	8.26	0.64	12.20	20.26	15.50	0FS38-70521
M6 x 1.0	0.76	3.25	9.53	9.52	10.85	0.77	15.00	23.49	18.60	0FS38-70626
M8 x 1.25	0.91	3.70	10.60	10.59	11.74	0.77	16.80	23.63	18.10	0FS38-70829

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread filetage / Gewinde / filetto / rosca	TORQUE APPLIED PLATE HELD STATIONARY RELATIVE TO INSERT	PULL-OUT SUPPORT	TORQUE APPLIED SPACER	PUSH-OUT SUPPORT
	Recommended max. torque Nm max.	kN	Torque-to-turn Nm min.	kN
M4 x 0.7	5.1	6.6	1.9	1.5
M5 x 0.8	7.9	8.0	2.6	1.9
M6 x 1.0	12.4	11.4	3.4	2.4
M8 x 1.25	16.4	15.7	3.6	2.8